MACHINECRAFT

ENGINEERED TO FORM

PF1-U | 1,200 x 1,000

Clear opening: front length x front-to-back depth / Maximum tool depth 400 mm

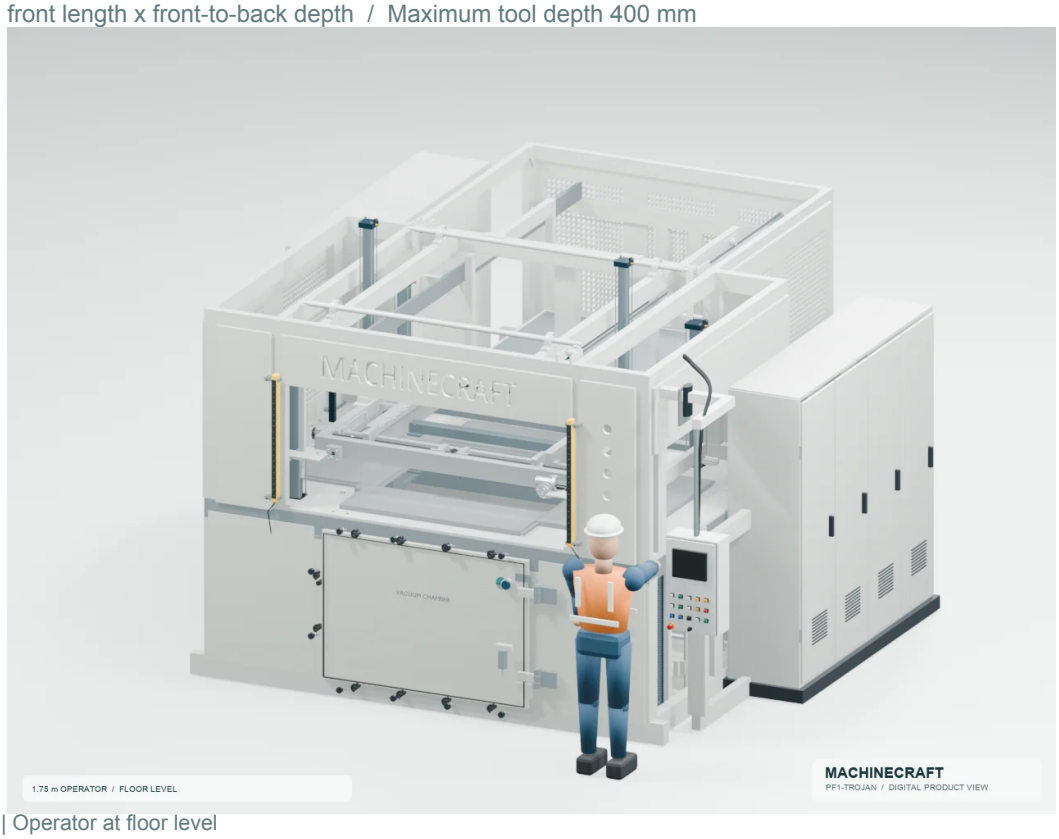

1.75 m operator | Operator at floor level

Clear forming opening	**1,200 x 1,000 mm**
Maximum vertical tool depth	**400 mm**
Clear forming area	**1.20 m²**
Floor-to-sheet height	**1,264 mm**
Pneumatic table stroke	**800 mm**
Pneumatic upper-frame stroke	**600 mm**
Table lift cylinders - preliminary	**4 x Ø 80 x 800 mm**
Upper-frame cylinders - preliminary	**2 x Ø 63 x 600 mm**
Heater traverse bore - preliminary	**Ø 40 mm**
Tool-locking arrangement	**2 independent sets / 2 heads per set**

CONFIGURATION SHOWN

Universal frames with matching centre members; aluminium grid plate and rubber seals; separate pneumatic hand-lever controls; independent vacuum/release circuits; upper and lower heaters; manual sheet loading; no plug assist.

Optional: cooled base plate, specified separately.

The 400 mm configuration uses the confirmed family height and strokes. All cylinder selections are preliminary. Final tool-load capacity, minimum openings, power, utilities, overall dimensions and machine weight are confirmed in the project offer. Rendered configuration; not a manufacturing drawing.